




## 1.0-Foot H Flume Discharge Table

25-30% Submergence Transition ±2-5% Accuracy

Formulas (H in feet):  $CFS = 0.000207 - 0.00523 H_{ft.}^{0.5} + 0.274445 H_{ft.}^{1.4} + 1.691257 H_{ft.}^{2.5}$

Formulas (H in meters):  $L/S = 0.005861587 - 0.26824961 H_m^{0.5} + 41.00900793 H_m^{1.4} + 933.7209182 H_m^{2.5}$

| FEET   | INCHES | METERS | CFS    | GPM    | MGD    | L/S    | M3/HR  |
|--|--------|--------|--------|--------|--------|--------|--------|
| Excessive error due to fluid-flow properties and boundary conditions |        |        |        |        |        |        |        |
| 0.01   | 0.12   | 0.0030 | 0.0007 | 0.3142 | 0.0005 | 0.0198 | 0.0713 |
| 0.02   | 0.24   | 0.0061 | 0.0017 | 0.7630 | 0.0011 | 0.0481 | 0.1732 |
| 0.03   | 0.36   | 0.0091 | 0.0027 | 1.212  | 0.0017 | 0.0765 | 0.2751 |
| 0.04   | 0.48   | 0.0122 | 0.0040 | 1.795  | 0.0026 | 0.1133 | 0.4076 |
| 0.05   | 0.60   | 0.0152 | 0.0056 | 2.513  | 0.0036 | 0.1586 | 0.5706 |
| 0.06   | 0.72   | 0.0183 | 0.0075 | 3.366  | 0.0048 | 0.2124 | 0.7643 |
| 0.07   | 0.84   | 0.0213 | 0.0097 | 4.353  | 0.0063 | 0.2747 | 0.9884 |
| 0.08   | 0.96   | 0.0244 | 0.0122 | 5.475  | 0.0079 | 0.3455 | 1.243  |
| 0.09   | 1.08   | 0.0274 | 0.0150 | 6.732  | 0.0097 | 0.4248 | 1.529  |
| 0.11   | 1.32   | 0.0335 | 0.0179 | 8.034  | 0.0116 | 0.5069 | 1.824  |
| 0.12   | 1.44   | 0.0366 | 0.0211 | 9.470  | 0.0136 | 0.5976 | 2.150  |
| 0.13   | 1.56   | 0.0396 | 0.0246 | 11.04  | 0.0159 | 0.6967 | 2.507  |
| 0.14   | 1.68   | 0.0427 | 0.0284 | 12.75  | 0.0184 | 0.8043 | 2.894  |
| 0.15   | 1.80   | 0.0457 | 0.0324 | 14.54  | 0.0209 | 0.9176 | 3.302  |
| 0.16   | 1.92   | 0.0488 | 0.0367 | 16.47  | 0.0237 | 1.039  | 3.740  |
| 0.17   | 2.04   | 0.0518 | 0.0413 | 18.54  | 0.0267 | 1.170  | 4.208  |
| 0.18   | 2.16   | 0.0549 | 0.0462 | 20.73  | 0.0299 | 1.308  | 4.708  |
| 0.19   | 2.28   | 0.0579 | 0.0515 | 23.11  | 0.0333 | 1.458  | 5.248  |
| 0.20   | 2.40   | 0.0610 | 0.0571 | 25.63  | 0.0369 | 1.617  | 5.818  |
| 0.21   | 2.52   | 0.0640 | 0.0630 | 28.27  | 0.0407 | 1.784  | 6.420  |
| 0.22   | 2.64   | 0.0671 | 0.0692 | 31.06  | 0.0447 | 1.960  | 7.051  |
| 0.23   | 2.76   | 0.0701 | 0.0758 | 34.02  | 0.0490 | 2.147  | 7.724  |
| 0.24   | 2.88   | 0.0732 | 0.0827 | 37.12  | 0.0534 | 2.342  | 8.427  |
| 0.25   | 3.00   | 0.0762 | 0.0900 | 40.39  | 0.0582 | 2.549  | 9.171  |
| 0.26   | 3.12   | 0.0792 | 0.0976 | 43.80  | 0.0631 | 2.764  | 9.945  |
| 0.27   | 3.24   | 0.0823 | 0.1055 | 47.35  | 0.0682 | 2.988  | 10.75  |
| 0.28   | 3.36   | 0.0853 | 0.1138 | 51.07  | 0.0735 | 3.223  | 11.60  |
| 0.29   | 3.48   | 0.0884 | 0.1226 | 55.02  | 0.0792 | 3.472  | 12.49  |
| 0.30   | 3.60   | 0.0914 | 0.1320 | 59.24  | 0.0853 | 3.738  | 13.45  |

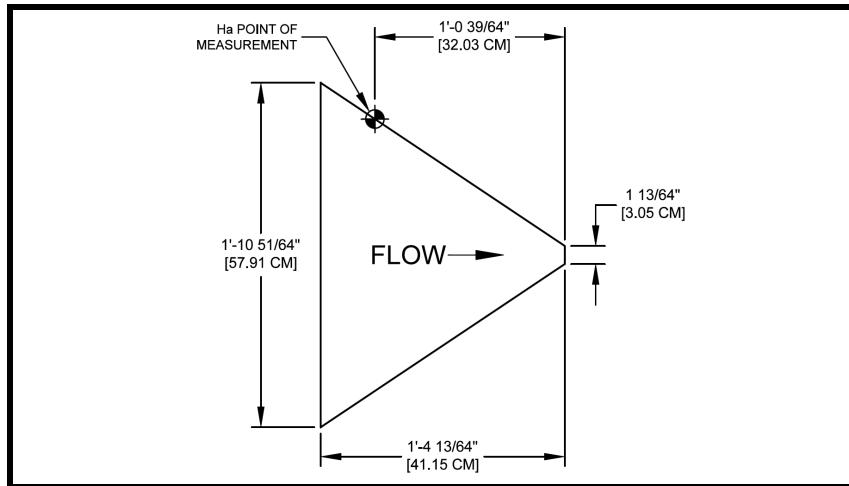

Curve fitted equation accurate to within 1.5%

Notes:

Discharge is calculated to top of flume



## 1.0-Foot H Flume Discharge Table

25-30% Submergence Transition ±2-5% Accuracy

Formulas (H in feet):  $CFS = 0.000207 - 0.00523 H_{ft}^{0.5} + 0.274445 H_{ft}^{1.4} + 1.691257 H_{ft}^{2.5}$   
Formulas (H in meters):  $L/S = 0.005861587 - 0.26824961 H_m^{0.5} + 41.00900793 H_m^{1.4} + 933.7209182 H_m^{2.5}$

| FEET | INCHES | METERS | CFS    | GPM   | MGD    | L/S   | M3/HR |
|------|--------|--------|--------|-------|--------|-------|-------|
| 0.31 | 3.72   | 0.0945 | 0.1410 | 63.28 | 0.0911 | 3.993 | 14.37 |
| 0.32 | 3.84   | 0.0975 | 0.1510 | 67.77 | 0.0976 | 4.276 | 15.39 |
| 0.33 | 3.96   | 0.1006 | 0.1610 | 72.26 | 0.1041 | 4.560 | 16.41 |
| 0.34 | 4.08   | 0.1036 | 0.1720 | 77.19 | 0.1112 | 4.871 | 17.53 |
| 0.35 | 4.20   | 0.1067 | 0.1830 | 82.13 | 0.1183 | 5.183 | 18.65 |
| 0.36 | 4.32   | 0.1097 | 0.1940 | 87.07 | 0.1254 | 5.494 | 19.77 |
| 0.37 | 4.44   | 0.1128 | 0.2060 | 92.45 | 0.1331 | 5.834 | 20.99 |
| 0.38 | 4.56   | 0.1158 | 0.2180 | 97.84 | 0.1409 | 6.174 | 22.21 |
| 0.39 | 4.68   | 0.1189 | 0.2310 | 103.7 | 0.1493 | 6.542 | 23.54 |
| 0.40 | 4.80   | 0.1219 | 0.2440 | 109.5 | 0.1577 | 6.910 | 24.86 |
| 0.41 | 4.92   | 0.1250 | 0.2570 | 115.3 | 0.1661 | 7.278 | 26.19 |
| 0.42 | 5.04   | 0.1280 | 0.2710 | 121.6 | 0.1751 | 7.675 | 27.61 |
| 0.43 | 5.16   | 0.1311 | 0.2850 | 127.9 | 0.1842 | 8.071 | 29.04 |
| 0.44 | 5.28   | 0.1341 | 0.3000 | 134.6 | 0.1939 | 8.496 | 30.57 |
| 0.45 | 5.40   | 0.1372 | 0.3150 | 141.4 | 0.2036 | 8.921 | 32.10 |
| 0.46 | 5.52   | 0.1402 | 0.3310 | 148.6 | 0.2139 | 9.374 | 33.73 |
| 0.47 | 5.64   | 0.1433 | 0.3470 | 155.7 | 0.2243 | 9.827 | 35.36 |
| 0.48 | 5.76   | 0.1463 | 0.3640 | 163.4 | 0.2353 | 10.31 | 37.09 |
| 0.49 | 5.88   | 0.1494 | 0.3810 | 171.0 | 0.2462 | 10.79 | 38.82 |
| 0.50 | 6.00   | 0.1524 | 0.3980 | 178.6 | 0.2572 | 11.27 | 40.56 |
| 0.51 | 6.12   | 0.1554 | 0.4160 | 186.7 | 0.2689 | 11.78 | 42.39 |
| 0.52 | 6.24   | 0.1585 | 0.4340 | 194.8 | 0.2805 | 12.29 | 44.22 |
| 0.53 | 6.36   | 0.1615 | 0.4530 | 203.3 | 0.2928 | 12.83 | 46.16 |
| 0.54 | 6.48   | 0.1646 | 0.4720 | 211.8 | 0.3051 | 13.37 | 48.10 |
| 0.55 | 6.60   | 0.1676 | 0.4920 | 220.8 | 0.3180 | 13.93 | 50.13 |
| 0.56 | 6.72   | 0.1707 | 0.5120 | 229.8 | 0.3309 | 14.50 | 52.17 |
| 0.57 | 6.84   | 0.1737 | 0.5330 | 239.2 | 0.3445 | 15.09 | 54.31 |
| 0.58 | 6.96   | 0.1768 | 0.5540 | 248.6 | 0.3581 | 15.69 | 56.45 |
| 0.59 | 7.08   | 0.1798 | 0.5760 | 258.5 | 0.3723 | 16.31 | 58.69 |
| 0.60 | 7.20   | 0.1829 | 0.5980 | 268.4 | 0.3865 | 16.94 | 60.94 |
| 0.61 | 7.32   | 0.1859 | 0.6210 | 278.7 | 0.4014 | 17.59 | 63.28 |
| 0.62 | 7.44   | 0.1890 | 0.6440 | 289.0 | 0.4162 | 18.24 | 65.62 |
| 0.63 | 7.56   | 0.1920 | 0.6680 | 299.8 | 0.4317 | 18.92 | 68.07 |
| 0.64 | 7.68   | 0.1951 | 0.6920 | 310.6 | 0.4472 | 19.60 | 70.51 |
| 0.65 | 7.80   | 0.1981 | 0.7170 | 321.8 | 0.4634 | 20.31 | 73.06 |
| 0.66 | 7.92   | 0.2012 | 0.7430 | 333.5 | 0.4802 | 21.04 | 75.71 |
| 0.67 | 8.04   | 0.2042 | 0.7690 | 345.1 | 0.4970 | 21.78 | 78.36 |
| 0.68 | 8.16   | 0.2073 | 0.7960 | 357.2 | 0.5145 | 22.54 | 81.11 |
| 0.69 | 8.28   | 0.2103 | 0.8230 | 369.4 | 0.5319 | 23.31 | 83.86 |
| 0.70 | 8.40   | 0.2134 | 0.8510 | 381.9 | 0.5500 | 24.10 | 86.72 |
| 0.71 | 8.52   | 0.2164 | 0.8800 | 394.9 | 0.5687 | 24.92 | 89.67 |
| 0.72 | 8.64   | 0.2195 | 0.9090 | 408.0 | 0.5875 | 25.74 | 92.63 |
| 0.73 | 8.76   | 0.2225 | 0.9390 | 421.4 | 0.6069 | 26.59 | 95.68 |
| 0.74 | 8.88   | 0.2256 | 0.9690 | 434.9 | 0.6263 | 27.44 | 98.74 |
| 0.75 | 9.00   | 0.2286 | 1.000  | 448.8 | 0.6463 | 28.32 | 101.9 |
| 0.76 | 9.12   | 0.2316 | 1.031  | 462.7 | 0.6663 | 29.20 | 105.1 |
| 0.77 | 9.24   | 0.2347 | 1.063  | 477.1 | 0.6870 | 30.10 | 108.3 |
| 0.78 | 9.36   | 0.2377 | 1.096  | 491.9 | 0.7083 | 31.04 | 111.7 |
| 0.79 | 9.48   | 0.2408 | 1.129  | 506.7 | 0.7297 | 31.97 | 115.0 |
| 0.80 | 9.60   | 0.2438 | 1.160  | 520.6 | 0.7497 | 32.85 | 118.2 |



## 1.0-Foot H Flume Discharge Table

25-30% Submergence Transition ±2-5% Accuracy

Formulas (H in feet): CFS = 0.000207 - 0.00523 H<sub>ft.</sub><sup>0.5</sup> + 0.274445 H<sub>ft.</sub><sup>1.4</sup> + 1.691257 H<sub>ft.</sub><sup>2.5</sup>

Formulas (H in meters): L/S = 0.005861587 - 0.26824961 H<sub>m</sub><sup>0.5</sup> + 41.00900793 H<sub>m</sub><sup>1.4</sup> + 933.7209182 H<sub>m</sub><sup>2.5</sup>

| FEET | INCHES | METERS | CFS   | GPM   | MGD    | L/S   | M3/HR |
|------|--------|--------|-------|-------|--------|-------|-------|
| 0.81 | 9.72   | 0.2469 | 1.200 | 538.6 | 0.7756 | 33.98 | 122.3 |
| 0.82 | 9.84   | 0.2499 | 1.230 | 552.0 | 0.7949 | 34.83 | 125.3 |
| 0.83 | 9.96   | 0.2530 | 1.270 | 570.0 | 0.8208 | 35.97 | 129.4 |
| 0.84 | 10.08  | 0.2560 | 1.300 | 583.4 | 0.8402 | 36.82 | 132.5 |
| 0.85 | 10.20  | 0.2591 | 1.340 | 601.4 | 0.8660 | 37.95 | 136.5 |
| 0.86 | 10.32  | 0.2621 | 1.380 | 619.3 | 0.8919 | 39.08 | 140.6 |
| 0.87 | 10.44  | 0.2652 | 1.410 | 632.8 | 0.9113 | 39.93 | 143.7 |
| 0.88 | 10.56  | 0.2682 | 1.450 | 650.8 | 0.9371 | 41.06 | 147.8 |
| 0.89 | 10.68  | 0.2713 | 1.490 | 668.7 | 0.9630 | 42.20 | 151.8 |
| 0.90 | 10.80  | 0.2743 | 1.530 | 686.7 | 0.9888 | 43.33 | 155.9 |
| 0.91 | 10.92  | 0.2774 | 1.570 | 704.6 | 1.015  | 44.46 | 160.0 |
| 0.92 | 11.04  | 0.2804 | 1.610 | 722.6 | 1.041  | 45.60 | 164.1 |
| 0.93 | 11.16  | 0.2835 | 1.660 | 745.0 | 1.073  | 47.01 | 169.2 |
| 0.94 | 11.28  | 0.2865 | 1.700 | 763.0 | 1.099  | 48.14 | 173.2 |
| 0.95 | 11.40  | 0.2896 | 1.740 | 780.9 | 1.125  | 49.28 | 177.3 |
| 0.96 | 11.52  | 0.2926 | 1.780 | 798.9 | 1.150  | 50.41 | 181.4 |
| 0.97 | 11.64  | 0.2957 | 1.830 | 821.3 | 1.183  | 51.83 | 186.5 |
| 0.98 | 11.76  | 0.2987 | 1.870 | 839.3 | 1.209  | 52.96 | 190.6 |
| 0.99 | 11.88  | 0.3018 | 1.920 | 861.7 | 1.241  | 54.37 | 195.6 |